

Operating Manual
EVOLUTION 6000
Thermal Imaging Camera





WARNING

Read this manual carefully before using the instrument. The thermal imaging camera will perform as designed only if it is used and maintained in accordance with the manufacturer's instruction. Otherwise, it could fail to perform as designed and persons who rely on this thermal imaging camera for their safety could sustain serious personal injury or death.

© MINE SAFETY APPLIANCES COMPANY 2013 - All Rights Reserved

This manual is available on the Internet at: www.msasafety.com

Manufactured by
MSA NORTH AMERICA
1000 Cranberry Woods Drive, Cranberry Township, PA 16066

Contents

1	Safety Regulations	5
1.1	Correct Use	5
1.2	Restrictions	5
1.3	Safety and Precautionary Measures	7
1.4	Product Warranty	8
	Express Warranty	8
	Extended Service	9
	Loaner Cameras	9
	Exclusive Remedy	9
	Exclusion of Consequential Damages	9
	Product Registration and Extended Warranties for MSA TICs	10
	EVOLUTION Thermal Imaging Camera Extended Warranty	10
2	Description	11
2.1	Overview and Brief Description of the Thermal Imaging Camera	11
3	Use	13
3.1	Safety Instructions	13
3.2	Switching ON and OFF	13
	Switching ON in normal mode, function test	13
	Switching OFF	13
3.3	Securing the Camera during use	14
	NFPA 1801 Basic and Plus Mode Operation	14
3.4	User Interface and Operation (All Models)	15
	On-Screen Indicators (All Models)	15
	Battery Status Indicator	18
	Battery Charging Indicator	18
	Trigger Button	19
3.5	EVOLUTION 6000+ TIC User Interface and Operation	21
3.6	Accessing the NFPA Plus Features	22
3.7	Accessing the Plus Features	23
	Digital Zoom Select (Plus Feature)	23
	Color Palette Select (Plus Feature)	23
	Color Palette Indicator (Plus Feature)	23
	Compass (Plus Feature)	23
	Range Finder (optional in the EVOLUTION 6000+ and EVOLUTION 6000X) (Plus Feature)	25
3.8	Video Transmitter (optional)	26

- 3.9 EVOLUTION 6000X User Interface and Operation 27
 - On-Screen Indicators 27
 - Trigger Operation with Flashlight and Laser Pointer Option Installed 28
 - Trigger Operation with Range Finder Option Installed 28
 - Naming Conventions for Still Image Files and Video files 28
 - Storage Space for Saved Files 28
 - Downloading files from the EVOLUTION 6000X TIC to a PC 29
- 3.10 Battery Installation 30
- 3.11 Battery Charging 31
 - Truck Mounted Charger 31
 - Multi-Use Charger 32
- 3.12 Battery Care 33
- 4 Camera Setup 34**
 - 4.1 On-Screen Camera Setup (EVOLUTION 6000+ TIC and 6000X TIC Only) 34
 - 4.2 Accessing On-screen Configuration Menu 34
 - 4.3 Options 35
 - Selecting Options 35
 - Configuring Options 35
 - 4.4 MSA EVOLUTION 6000 Configuration Application 37
 - Minimum FireService Utility PC requirements: 37
 - Accessing Options and Settings via MSA EVOLUTION 6000 Configuration Application 37
- 5 Maintenance 39**
 - 5.1 Before Each Use 39
 - 5.2 After Each Use 39
 - 5.3 Germanium Lens Replacement 40
- 6 Service 41**
- 7 Technical Data 42**
 - 7.1 Technical Data Transmitter 43
 - Frequencies and Approvals 43
- 8 Ordering Information 44**

1 Safety Regulations

1.1 Correct Use

This manual includes detailed operating instructions for the complete EVOLUTION 6000 Thermal Imaging Camera (TIC) Series, including the EVOLUTION 6000 TIC, EVOLUTION 6000+ TIC and EVOLUTION 6000X TIC, hereafter referred to as camera. Each camera is designed to assist firefighters to see where visibility is impaired by smoke and darkness.

The cameras were designed to withstand the firefighting conditions of heat, flame, driving water spray, and frequent impact normally seen by a firefighter. Extension beyond these demands may damage the camera and render it inoperable. It is not recommended to use the camera for extended periods in high-heat conditions.

The thermal imaging camera is not a substitute for standard techniques and precautionary measures. The user must ensure that the standard operational processes continue to be observed and maintained even when using the thermal imaging camera.

The thermal imaging camera can be used for the following purposes:

- Initial size-up/Scene assessment
- Locating the source of the fire
- Determining the extent of the fire
- Determining entry and ventilation points
- Detection of flashover dangers
- Search and rescue operations
- Hazmat situations
- Overhaul
- Preplanning/Fire code inspections
- Supporting police work
- Response vehicle navigation (darkness or heavy smoke)

1.2 Restrictions

The thermal imaging camera is not suitable for the following applications:

- Although the camera is waterproof, it is unable to take underwater images.
- Likewise, the camera does not image through glass, water or shiny surfaces which may act like a mirror.
- The camera does not improve the user's sight. Corrective lenses must continue to be worn.

It is imperative that this operating manual be read and observed when using the product. In particular, the safety instructions, as well as the information for the use and operation of the product, must be carefully read and observed. Furthermore, the national regulations applicable in the user's country must be taken into account for a safe use.

Alternative use, or use outside this specification will be considered as non-compliance. This also applies especially to unauthorised alterations to the product and to commissioning work that has not been carried out by MSA or authorised persons.

The warranties made by Mine Safety Appliances Company with respect to the product are voided if the product is not used and serviced in accordance with the instructions in this manual. Please

protect yourself and others by following them. We encourage our customers to write or call regarding this equipment prior to use or for any additional information relative to use or repairs. During regular working hours, call 1-877-MSA-FIRE in the US.

This camera contains batteries and electronics. Dispose of or recycle in accordance with all applicable federal state and local regulations.

By order of the US Department of Commerce, in conjunction with the US Department of State and DOD, this Thermal Imaging Camera may not be resold, re-exported, transferred, or otherwise disposed of outside of the country named as the location of foreign end use, either in its original form or after being incorporated into other end items, without the prior written approval of the US Department of Commerce. Violation of this regulation may result in fine and/or imprisonment.

1.3 Safety and Precautionary Measures



WARNING

- (1) The user must be trained and thoroughly familiar with proper operation and limitations of the thermal imaging camera prior to use. Use in controlled live-burn exercises is suggested before using the equipment in actual emergency situations. Improper use of the equipment in a hazardous atmosphere could result in serious personal injury or death.
- (2) Do not rely on the thermal imaging camera as the sole means of navigation or deviate from standard fire-fighting navigational practices during use. Although the system provides an image in dark and smoky environments, the user may become disoriented or lost in such environments if the system becomes inoperative.
- (3) Most electronic devices cease to operate at certain high temperature extremes. Tests on the EVOLUTION 6000 Series TICs indicate that they provide an acceptable image when subjected to an ambient temperature of approximately 120°C (248°F) for 20 minutes. Exposure to conditions exceeding these result in deterioration and loss of image.
- (4) This equipment is suitable for use in Class I, Division 2, Groups A, B, C and D or nonhazardous locations only (equivalent to ATEX industrial area, equipment group II, zone 2, gas group IIB).
- (5) This thermal imaging camera is not rated as "Intrinsically Safe". Do not use the system in environments or atmospheres where static or sparks may cause an explosion.
- (6) Before entering a hostile environment, test the thermal imaging camera as specified in the instructions to ensure that it is functional. After each use, inspect the camera to determine if servicing is required.
- (7) Exposure to high temperature environments for an extended period of time may cause degradation or loss of thermal image. Avoid heat saturation or overexposure of the equipment. If degradation of the thermal image is observed, immediately remove the equipment from the high heat environment and allow it to cool until the thermal image returns to normal; otherwise, the system may become inoperative.
- (8) Do not mark the camera i.e., with stamps, labels, paint or other method. Use of such markings may interfere with camera use or may constitute a flammability hazard.
- (9) Replacement batteries must exactly match the ratings and configuration of those supplied with the camera. Use of unapproved batteries may render the system inoperative.
- (10) Use only battery chargers made available by MSA for use with this device; other chargers may damage the battery pack and the device. Dispose of batteries in accordance with local health and safety regulations.
- (11) Do not remove the thermal imaging camera cover or casing. Only authorized personnel may service the camera.

FAILURE TO FOLLOW THE ABOVE WARNINGS CAN RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

 **CAUTION**

- (1) Ensure battery is fully charged before use. If not fully charged, the camera will not operate for the specified amount of time. Monitor battery level during use and immediately exit the hazardous area when a low battery warning is observed.
- (2) Electromagnetic radiation (radio transmissions) may cause interference. Minimize nearby radio transmissions if excessive interference occurs.
- (3) To avoid lens fogging, the user may coat the lens and display window with MSA anti-fog material (MSA P/N 13016).
- (4) Do not point the thermal imaging camera directly at the sun; otherwise, damage to the detector may occur.
- (5) Do not drop the thermal imaging camera. Although the camera is designed to withstand normal impacts that occur in fire service, such impacts may alter the focus or damage the unit.

FAILURE TO FOLLOW THE ABOVE CAUTIONS CAN RESULT IN PERSONAL INJURY OR EQUIPMENT DAMAGE.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency and, if not installed in accordance with instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and the receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Canada:

This Class B digital apparatus complies with Canadian ICES-003.

1.4 Product Warranty

Express Warranty

MSA warrants that this product and its accessories are free from mechanical defects or faulty workmanship as prescribed in the chart below, provided they have been installed, used, and maintained in accordance with the instructions and/or recommendations contained in the instructions delivered with the equipment. MSA shall be released from all obligations under this warranty in the event repairs or modifications are made by persons other than its own or authorized service personnel. No agent, employee or representative of MSA has any authority to bind MSA to any affirmation, representation or warranty concerning the goods sold, and unless an affirmation, representation or warranty made by an agent, employee or representative is specifically included within the written agreement for the goods sold it shall not be enforceable by the original end-user.

MSA makes no warranty concerning components or accessories not manufactured by MSA, but will pass on to the original end-user all warranties of manufacturers of such components. THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, AND IS STRICTLY LIMITED TO THE TERMS HEREOF. MSA SPECIFICALLY DISCLAIMS ANY WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE.

Products covered by this Express Warranty include the EVOLUTION 6000, EVOLUTION 6000+ and EVOLUTION 6000X Thermal Imaging Cameras (TICs). All warranty periods referenced below are from the date of sale to the original end-user unless otherwise noted.

Thermal Imaging Camera (includes camera core and camera components)	2 years
Truck/Wall/Desktop Chargers, External Receivers and Transmission Equipment	1 year
Replacement Parts / Repairs (non-warranty)	90 Days from date of repair
Factory Upgrades	90 Days or remainder of existing warranty, whichever is longer

Extended Service

MSA offers an Extended Service contract for TICs at the customer's request. Details are listed on the next page of this manual.

Contact MSA Fire Service Customer Service (in the US: 1-800-MSA-2222 in the US) for additional information and arrangements.



For information on availability outside the US, contact your local MSA representative (see back page of this manual).

Loaner Cameras

MSA offers a loaner camera program for customers when deemed necessary (extended repair time, critical equipment replacement, etc.). The loaner camera will not necessarily be the exact model that it is replacing. Contact MSA Fire Service Customer Service (1-800-MSA-2222 in the US) for additional information and arrangements.

Exclusive Remedy

It is expressly agreed that the original end-user's sole and exclusive remedy for breach of the above warranty, for any tortious conduct of MSA, or for any other cause of action, shall be the repair and/or replacement, at MSA's option, of any equipment or parts thereof, that after examination by MSA are proven to be defective. Replacement equipment and/or parts will be provided at no cost to the Original end user, F.O.B. original end-user's named place of destination. Failure of MSA to successfully repair any nonconforming product shall not cause the remedy established hereby to fail of its essential purpose.

Exclusion of Consequential Damages

Original end-user specifically understands and agrees that under no circumstances will MSA be liable to original end-user for economic, special, incidental, or consequential damages or losses of any kind whatsoever, including but not limited to, loss of anticipated profits and any other loss caused by reason of the non-operation of the goods. This exclusion is applicable to claims for breach of warranty, tortious conduct or any other cause of action against MSA.

Product Registration and Extended Warranties for MSA TICs

Thank you for purchasing an MSA Thermal Imaging Camera. Registering your products with MSA will improve the processing of any warranty claims and enable you to receive information regarding product updates and new products. Please register your camera online or purchase an extended warranty at www.MSASafety.com/register.

MSA requires that the camera and accessories be installed, used, and/or maintained as specified in the product instructions. All TICs and accessories sent in for warranty repair will be inspected for signs of excessive rough handling and operation significantly beyond specifications in the instructions. The warranty coverage is for material defects and/or faulty workmanship only. Repair and labor required for normal wear and tear are not covered under the warranty and are the responsibility of the original end-user.



For information on availability outside the US, contact your local MSA representative (see back page of this manual).

EVOLUTION Thermal Imaging Camera Extended Warranty

Extended warranties must be processed for EACH Thermal Imaging Camera.

Apply for your MSA Thermal Imaging Camera Extended Warranty coverage online at www.MSASafety.com/register or phone (in the US: 1-800-MSA-2222 in the US, other countries: contact information on the last page of this manual) for assistance.

- Extended warranty requests MUST be exercised within the first 6 months from the date of manufacture. The last three characters (MY, or "month-year-year") of the TIC's serial number (located in the battery compartment of the Thermal Imaging Camera) dictate this timeframe (XX-XXXX-MY).
- Extended warranty coverage is available up to 36 months after the standard warranty has expired. Select the Extended Warranty coverage for one, two or three years.
- Extended Warranty rates are: one year = \$ 1,000.00, two years = \$ 2,250.00 and three years = \$ 3,750.00.
- Extended warranty and standard warranty both begin from the date of purchase by the end user.
- This Extended Warranty program applies only to MSA Thermal Imaging Cameras. Consumable batteries, battery chargers and accessories are not covered.

NOTE: This manual contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only these instructions contain the complete and detailed information concerning proper use and care of these products.



For information on availability outside the US, contact your local MSA representative (see back page of this manual).

2 Description

2.1 Overview and Brief Description of the Thermal Imaging Camera



Fig. 1 The EVOLUTION 6000 camera

All EVOLUTION 6000 Series Thermal Imaging Cameras are:

- equipped with a 320 x 240 uncooled microbolometer heat sensor which provides clear, high resolution images
- equipped with a large screen, high definition display
- equipped with a built-in flashlight and laser pointer
- dustproof and waterproof for short periods submerged under water up to a depth of 3 feet (1 m) corresponding to IP 67
- able to be configured through a desktop PC through our FireService Utility software
- available with multiple carrying and attachment options

In addition to the above features, the EVOLUTION 6000+ TIC:

- features a 2X/4X digital zoom feature
- is equipped with up to five user-selectable palettes in addition to standard "white-hot" imagery
- includes a solid state compass to aid in navigation
- offers an optional laser range finder to accurately measure distances (replaces flashlight and laserpointer if selected)
- offers an optional fully integrated 2.4 GHz (or 2.1 GHz, depending on local legislation), two channel video transmission system
- Able to be configured on the camera or through a desktop PC using MSA's FireService Utility software

Our most advanced camera, the EVOLUTION 6000X TIC, offers all of the above and also includes:

- a fully integrated video recording system with USB download capability
- the ability to snap, store and download still pictures through the integrated USB connection

3 Use

3.1 Safety Instructions

Check the batteries before and during use

Check whether the batteries are fully charged before using. If not fully charged, the nominal operating time cannot be achieved. Also check the battery level during use.

For details on charging → chapter 3.11.

3.2 Switching ON and OFF

Switching ON in normal mode, function test



Fig. 2 ON/OFF button

- (1) Press green ON/OFF button for approx. 1 second.
 - Within 5 seconds, the TIC carries out a self-test of the sensor electronics.
 - ▷ Status LEDs under display illuminate according to battery status (→ section Battery Status Indicator page 18).
 - ▷ The current software version briefly displays.
 - ▷ An image appears after a few seconds on the display.
- (2) Check camera function:
 - Direct the camera toward an object or person until the thermal image shows on the display.
 - ▷ The camera is now ready for use.

Switching OFF

- (1) Keep ON/OFF button pressed for approx. 3 seconds until all LED indicators switch off.
- (2) Release the ON/OFF button as soon as all LED indicators switch off.
 - ▷ The camera is switched OFF.

3.3 Securing the Camera during use

The camera may be secured to the user in different ways using one of the self-retracting attachment cables.



Fig. 3 Attachment cable locations

To use the attachment cables:

- (1) Pull the spring loaded cable out and away from the camera body.
- (2) Slip a carabineer or similar securing device through the cable loop.
- (3) Release the cable.
 - ▷ Internal springs automatically pull the attachment cables in tight to the camera housing to minimize any snag hazards.

NFPA 1801 Basic and Plus Mode Operation

Certain Evolution 6000 camera models are compliant with *NFPA 1801 Standard on Thermal Imagers for the Fire Service; 2013 Edition*.

See approval information on the label located on the underside of the camera housing. NFPA 1801 describes a required "Basic Mode" of operation common among all compliant thermal imaging cameras. It also allows for a "Plus Mode" operation which, once accessed, provides a number of useful features and options for the firefighter trained in their use.

The EVOLUTION 6000 camera always operates in the NFPA 1801 defined "Basic Mode". The EVOLUTION 6000+ and EVOLUTION 6000X TICs, however, provide "Plus Mode" features. See chapter 3.6 for information on accessing the Plus Mode.

Non-NFPA compliant EVOLUTION 6000+ and EVOLUTION 6000X TICs do not have a "Basic Mode" and will automatically operate in "Plus Mode" when the camera is turned on.

3.4 User Interface and Operation (All Models)

The following features and functions are common to all camera models. Additional User interface and Operating instructions for the EVOLUTION 6000+ TIC can be found in chapter 3.5. and, for the EVOLUTION 6000X TIC, in chapter 3.9.

Many features can be custom configured using the MSA Fire Service Utility.

The EVOLUTION 6000+ TIC and EVOLUTION 6000X TIC also include an on-screen configuration feature that allows basic setup modifications to be made without a computer. See chapter 4 for details.

On-Screen Indicators (All Models)

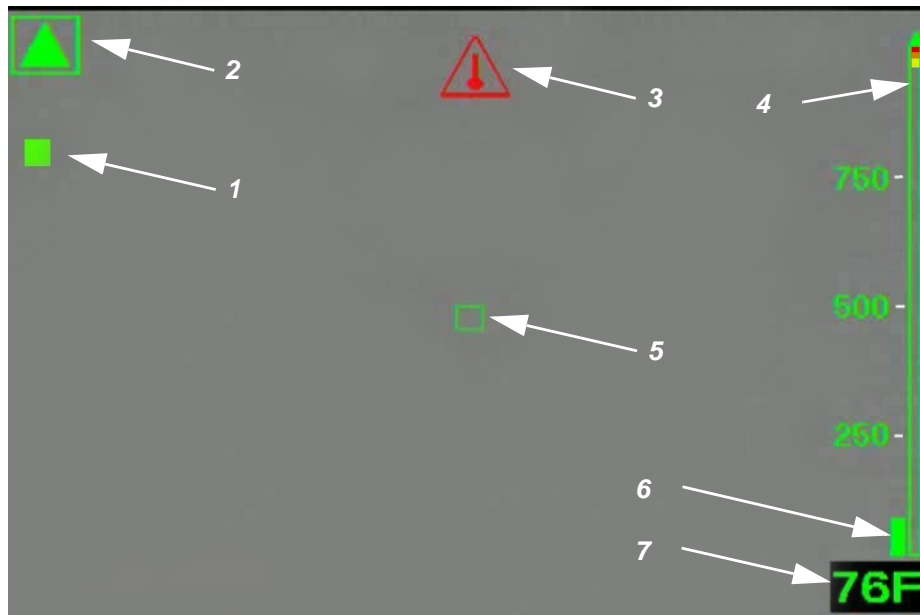


Fig. 4 On-Screen indicators

- | | | | |
|---|-------------------------------------|---|-------------------------------|
| 1 | Shutter indicator | 5 | Digital temperature target |
| 2 | Low sensitivity mode indicator | 6 | Temperature indicator bar |
| 3 | Internal over temperature indicator | 7 | Digital temperature indicator |
| 4 | Color reference bar | | |

High and Low Sensitivity Mode

The camera has a high and a low sensitivity mode for showing images in different temperature ranges.

- After turning the camera ON it will be in the high sensitivity mode.
- The camera automatically switches from high sensitivity mode to low sensitivity mode in case of extreme heat (a significant portion, 32% of pixels) of the image exceeding 140 °C.

In this case, the display shows a small green triangle above the color reference bar to indicate that the scale changed from the high sensitivity mode scale. A larger green triangle appears in the upper left-hand corner of the display.

- The camera switches from low sensitivity mode to high sensitivity mode when 89% of pixels show less than 120 °C.

In the low sensitivity mode, the camera's dynamic range expands to enable the user to distinguish objects and people more easily in environments with large temperature ranges. This mode also prevents white-out. (White-out or oversaturation occurs when a thermal imaging detector is subjected to too much thermal energy, and the image, which appears as a white cloud, no longer identifies fine details in the scene.)

Shutter Indicator

When the camera is in operation, it is periodically necessary to refresh the focal plane array in order to operate properly. This occurs via an internal shutter mechanism. When the camera shutters, the camera image freezes for approximately one second.

The shutter indicator is a green square shown at the top left of the display for approx. 3 sec before and during the shuttering cycle (Pos. 1, Fig. 4, page 15).

Shuttering may occur more frequently with greater heat load.

Digital Temperature Target/Digital Temperature Indicator

The Digital Temperature Indicator provides an approximate numeric temperature of an object in Fahrenheit or Celsius, depending on the camera settings. To measure the temperature of an object, aim the camera so the digital temperature target (Pos. 5, Fig. 4, page 15) in the center of the display is on the object to be measured.

NOTE: Displayed temperature is an average of pixels within the green box. An incorrect temperature could display if all pixels are not on the object to be measured.

Temperature range is:

- -40°F (-40°C) to 1022°F (550°C) in Low Sensitivity mode and
- -40°F (-40°C) to 320°F (160°C) in High Sensitivity mode.

Displayed temperature is intended to provide the user with an approximate temperature reading. See chapter 7 for the Digital Temperature Indicator accuracy.

Temperature Indicator Bar

The Temperature Indicator Bar works with the Digital Temperature Indicator to graphically represent the approximate temperature of an object in the green box in the center of the display.

Color Reference Bar

The Color Reference Bar spans temperatures from 0°F (0°C) to 300°F (160°C) in High Sensitivity mode and 0°F (0°C) to 1000°F (600°C) in Low Sensitivity mode and provides a temperature reference for the Temperature Indicator Bar. The scale dynamically changes with a change in sensitivity mode. A green triangle appears over the scale to indicate a sensitivity mode other than high-sensitivity mode.

- The scale is also used as a reference for image colorization. The yellow, orange and red segments of the bar correspond to the temperatures at which colorization is introduced on the camera.

NOTE: Colorization is introduced at different temperatures depending on whether the camera is in High or Low Sensitivity mode.

The Color Reference Bar is only visible for "White Hot" imagery.

In High Sensitivity Mode

When Temperatures are	Objects:
below 291 °F (144 °C)	Are shown as standard gray scale images
between 291 °F (144 °C) and 302 °F (150 °C)	Turn yellow , starting with light shades changing to darker shades
between 302 °F (150 °C) and 311 °F (155 °C)	Turn orange , starting with light shades changing to darker shades
over 311°F (155 °C)	Turn red , starting with light shades changing to darker shades

In Low Sensitivity Mode

When Temperatures are:	Objects:
between 1000 °F (540 °C) and 1047 °F (564 °C)	Turn yellow , starting with light shades changing to darker shades
between 1047 °F (564 °C) and 1090 °F (588 °C)	Turn orange , starting with light shades changing to darker shades
over 1090 °F (588 °C)	Turn red , starting with light shades changing to darker shades

Over Temperature Warning

An Over Temperature Warning activates when the internal system electronics approach maximum recommended operating temperature limits.

- A red indicator flashes on the center top section of the display area when the camera exceeds recommended operational thermal limits.


WARNING

Most electronic devices cease to operate at certain high temperature extremes. Tests on the EVOLUTION 6000 series of TICs indicate that they provide an acceptable image when subjected to an ambient temperature of approximately 120°C (248°F) for about twenty minutes. Exposure to conditions exceeding these may result in deterioration and loss of image.

The environmental thermal tolerance values for the camera can be found in chapter 7.

Battery Status Indicator

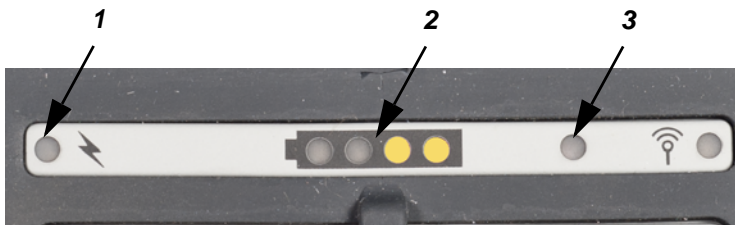


Fig. 5 On-Screen indicators

- | | |
|------------------------------|-----------------------------|
| 1 Battery charging indicator | 3 Display brightness sensor |
| 2 Battery status indicator | |

Remaining battery capacity is shown by 4 equal battery segments:

Indication	Remaining Battery Capacity
4 green segments	Nominal 75 to 100%
3 green segments	Nominal 50 to 75%
2 yellow segments	Nominal 25 to 50%
1 red segment	Nominal 0 to 25%
1 red segment flashing	Critically low battery (5 minutes or less remaining)

NOTE: If the red segment flashes three times at turn-ON, the battery is too low to operate the camera and the camera will switch OFF.

Battery Charging Indicator

When the camera is placed into the optional vehicle charger, the charging indicator shows the charging status.

- Red indicates charging is in progress.
- Green indicates charging is complete.

NOTE: If the indicator is not lit, the camera is not in proper contact with the vehicle charger base. Ensure that camera is properly installed in the charger and that charger has power. Clean the battery charging contacts on the front of the camera if necessary.

Trigger Button



Fig. 6 Trigger button

Flashlight and Laser Pointer



WARNING

Safety measures which must be observed:

Observe the appropriate country-specific safety measures for users of laser class 3R equipment. Laser class 3R laser equipment is potentially hazardous to eyes. Use of operating and adjustment equipment and procedures other than those indicated here can lead to dangerous exposure to radiation. Modification of the laser equipment is not permitted. This Operating Manual must be retained and passed to the next owner of the laser equipment.

Personal safety precautions:

This laser equipment may only be used by properly trained persons. Do not aim the laser beam at people. If the laser beam falls directly on your eye, consciously close your eyes and move your head out of the beam immediately. Do not look into the direct or reflected beam. Do not aim the laser beam at people. Persons under 18 years of age must not use this equipment.

Safety measures to be applied in areas where the equipment is used:

Ensure that no-one can look directly into the laser beam:

- Avoid accidental reflections, for example by covering or removing reflective surfaces in the vicinity of the laser equipment
- Position / align the laser beam well away from eye height
- Restrict the laser beam to the area where it is to be used, for example by screening with non-reflective surfaces
- When not in use, store the laser equipment so that it cannot be accessed by unauthorised persons

The built-in flashlight and laser pointer is standard equipment in the camera.

The flashlight is an LED-based light that can be used to aid navigation in darkness and light smoke.

The laser pointer tool allows the camera operator to highlight an object or area requiring attention.

NOTE: The laser pointer and flashlight will not function at the same time.

NOTE: Should the laser beam appear to be weak or distorted, ensure that the laser pointer window on the front of the camera is free of dirt and water.

Trigger Button Operation	Result
First short press	Turns ON the flashlight
Second short press	Turns OFF the flashlight and turns ON the laser pointer
Third short press	Turns OFF the laser pointer

The trigger button also activates the distance meter/range finder (→ section “Range Finder (optional in the EVOLUTION 6000+ and EVOLUTION 6000X) (Plus Feature)” page 25) if the camera is so equipped.

3.5 EVOLUTION 6000+ TIC User Interface and Operation

The following features and functions are common to the EVOLUTION 6000+ TIC and EVOLUTION 6000X TIC models.

Additional User interface and Operating instructions for the EVOLUTION 6000X TIC can be found in chapter 3.9.



Fig. 7 Additional buttons EVOLUTION 6000+ TIC and 6000 X TIC

- | | | | |
|---|----------------|---|---------------------------|
| 1 | ZOOM button | 3 | Transmitter indicator LED |
| 2 | PALETTE button | | |

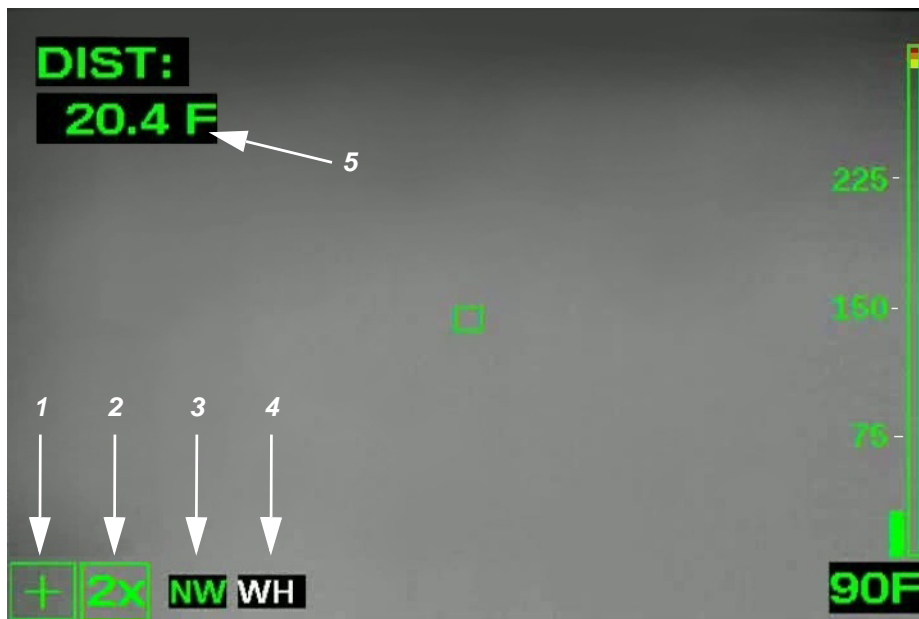


Fig. 8 Additional EVOLUTION 6000+ TIC and 6000 X TIC on-screen indicators

- | | | | |
|---|-------------------------------------|---|--|
| 1 | Plus Mode indicator | 4 | Color Palette indicator (Plus Feature) |
| 2 | Zoom Level indicator (Plus Feature) | 5 | Range Finder |
| 3 | Compass (Plus Feature) | | |

3.6 Accessing the NFPA Plus Features

Thermal imaging cameras compliant with *NFPA 1801, Standard for Thermal Imaging Cameras in the Fire Service*, require a deliberate action to access all camera features beyond those described as NFPA Basic functions.

Non-NFPA-compliant cameras (reference the approval label on the underside of the camera) do not require a special sequence. All features are available at camera turn-ON.



WARNING

Do not attempt to use NFPA Plus features without adequate training. Without proper training, some features may lead to firefighter disorientation and unexpected camera operation.

Once the camera is turned ON, push and hold either the ZOOM or the PALETTE button for three seconds until the Plus Mode Indicator appears on the screen (→ Fig. 8).

- All Plus features are now available.
- All applicable indicators appear on screen.

To return to the Basic mode:

- (1) Briefly push and release the ON/OFF button.
 - or
- (2) Turn the camera OFF and back ON again.
 - ▷ The Plus mode indicator and any applicable feature indicators turn OFF.

3.7 Accessing the Plus Features

Digital Zoom Select (Plus Feature)

Digital zoom narrows the apparent angle of view of the image, it takes a portion of the image and expands that image to the full size of the screen.

The camera enters the Plus mode in standard 1X zoom.

- (1) Push the ZOOM button once for a 2X zoom.
 - ▷ The Zoom Indicator shows 2X.
- (2) Push the ZOOM button again for a 4X zoom.
 - ▷ The Zoom Indicator shows 4X.
- (3) Push the ZOOM button again to return to standard 1X zoom.
 - ▷ The Zoom indicator turns OFF.
- (4) Push and hold the ZOOM button for two seconds to skip immediately back to 1X zoom.

Color Palette Select (Plus Feature)

The camera enters the Plus mode with standard white-hot imagery. The EVOLUTION 6000+ TIC and EVOLUTION 6000X TIC feature up to five user-selectable display palettes to enhance imagery in a variety of operational environments. The Color Palette selection (PALETTE) button steps the camera through the available color palettes. In addition to standard white-hot, five additional color palettes are available.

- (1) Push the PALETTE button to access the available color palettes.
 - ▷ The Color Palette indicator displays a label for the selected palette.
 - ▷ Each push of the PALETTE button steps the camera to the next available palette.

NOTE: The color palette loops back to standard white-hot after the last available color palette.

- (2) Push and hold the PALETTE button for two seconds to skip immediately back to the standard white-hot palette.

Color Palette Indicator (Plus Feature)

The selected color palette, for example white hot, displays in this box (→ chapter 3.5). For information on disabling color palettes, choosing alternate color palettes and selecting the number of available color palettes, → chapter 4.

Compass (Plus Feature)

The integral compass feature allows the user to determine the direction the camera is pointed in 45° increments (N, NE, E, SE, S, SW, W and NW). Compass direction may be displayed using text or graphics. Reference compass settings in the camera configuration software (see chapter 4.3).

- The compass must be calibrated before use. See section “Configuring Options” on page 35 for instructions.
- The camera must be held within 45° of vertical for compass to obtain an accurate reading. If the camera is tilted too far in any direction, "==" displays instead of the direction.

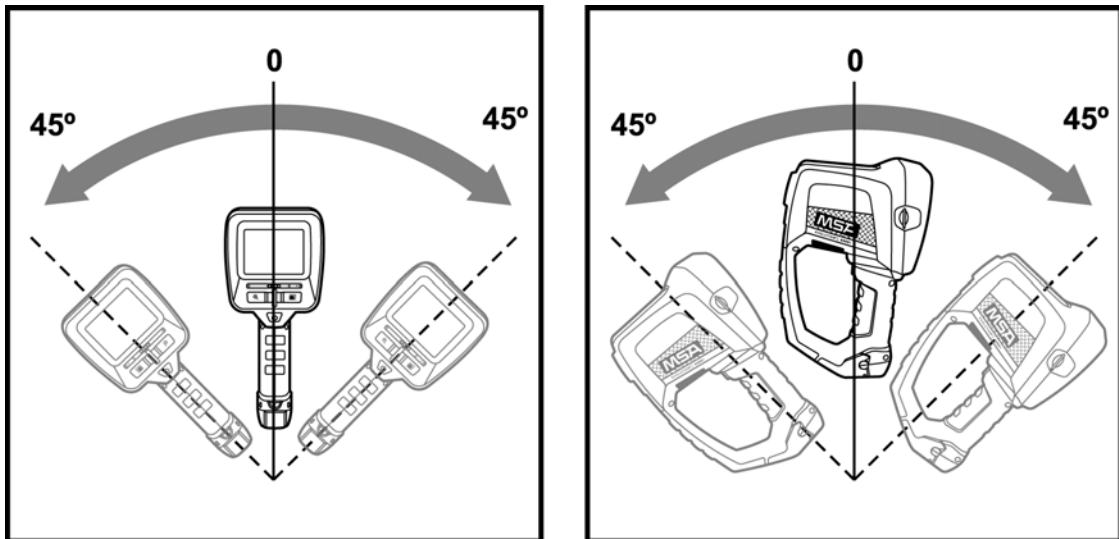


Fig. 9 Camera orientation

True north displays if true north is selected and a valid declination angle is entered during setup. The default is magnetic north.

For text display mode, if magnetic North is selected, orientation is shown as green letters on black background. If True North is selected, yellow letters on black background show the compass orientation.

For icon display mode, magnetic North has a green flag next to the icon. True North has a yellow star next to the icon.

As with any compass, soft iron and localized magnetic fields may result in incorrect compass readings. It is recommended that the compass be calibrated every month or immediately after being subjected to a strong magnetic field. Examples of strong magnetic fields include, but are not limited to:

- power lines
- transformers
- strong magnets.

A compass indicator of "CC" indicates that compass is out of calibration. See section "Configuring Options" on page 35 for instructions.



WARNING

As with any magnetic compass, the indicated direction can be influenced by soft iron structures, including buildings and localized magnetic fields from nearby electrical equipment. Do not rely on the compass as a sole means of navigation. The compass is intended to be an aid and is not a substitute for proper training.

See chapter 4.3 for information on enabling and disabling the compass, selecting either a text or an icon indicator, compass calibration, and entering a local declination angle for true north readings.

Range Finder (optional in the EVOLUTION 6000+ and EVOLUTION 6000X) (Plus Feature)**WARNING****Safety measures which must be observed:**

Observe the appropriate country-specific safety measures for users of laser class 3R equipment. Laser class 3R laser equipment is potentially hazardous to eyes. Use of operating and adjustment equipment and procedures other than those indicated here can lead to dangerous exposure to radiation. Modification of the laser equipment is not permitted. This Operating Manual must be retained and passed to the next owner of the laser equipment.

Personal safety precautions:

This laser equipment may only be used by properly trained persons. Do not aim the laser beam at people. If the laser beam falls directly on your eye, consciously close your eyes and move your head out of the beam immediately. Do not look into the direct or reflected beam. Do not aim the laser beam at people. Persons under 18 years of age must not use this equipment.

Safety measures to be applied in areas where the equipment is used:

Ensure that no-one can look directly into the laser beam:

- Avoid accidental reflections, for example by covering or removing reflective surfaces in the vicinity of the laser equipment
- Position / align the laser beam well away from eye height
- Restrict the laser beam to the area where it is to be used, for example by screening with non-reflective surfaces
- When not in use, store the laser equipment so that it cannot be accessed by unauthorised persons

NOTE: if installed, this feature is accessed only when the EVOLUTION 6000+ TIC or EVOLUTION 6000X TIC is in the NFPA Plus mode.

The integral range finder is a laser-based distance measuring tool that can be used to assist fire-fighters in estimating a distance from the camera to a stationary target.

The distance may be displayed in feet or meters.

Depending on conditions and ambient light intensity:

- Minimum distance measurement is approximately 15 feet (5 meters)
 - Maximum distance measurement is approximately 210 feet (70 meters).
- (1) To take a distance measurement, pull and hold the trigger and aim the red, visible laser at the object to be measured.
 - (2) Release the trigger to signal the camera to take the distance measurement.
 - The distance from the camera to the object displays in feet or meters, depending on the camera setup.
 - "ERROR" displays if a valid reading cannot be displayed.
 - As long as the previous distance measurement remains on the display, every quick pull and release of the trigger will provide a rapid measurement update
 - "<15 ft" ("<5 m") will be displayed if measured distance is too short.

NOTE: Should the range finder fail to display a measurement, ensure that the range finder window on the front of the camera is clean and free of water drops.

**WARNING**

The laser range finder may not operate in all environments and may return erroneous readings in some extreme situations. Thick smoke, steam, water and dirt on the range finder lens may interfere with the laser and prevent accurate readings. Do not use the laser range finder for critical measurements.

See section “Configuring Options” on page 35 for instructions and information on enabling and disabling the range finder and selecting the distance units (meters or feet).

3.8 Video Transmitter (optional)

The video transmitter operates in the 2.4 GHz license free ISM band and offers two fully independent channels.

In order to use the video transmitter, it may be necessary, depending on local regulations, to make a license application for the operation of this system to the local Regulating Authority for Telecommunications and Post which may cost a regular/annual fee (outside the USA).

The video transmitter indicator is illuminated when the video transmitter is operating. Video transmitter enable and disable as well as channel select are selectable via the on-screen setup or the MSA FireService Utility application. See section “Configuring Options” on page 35 for instructions and details regarding the on-screen setup options for the video transmitter.

**WARNING**

The radio and its antenna are required to be mounted and kept at least 8 inches (20 cm) away from any part of the user's torso or head and must not be co-located or operated in conjunction with any other antenna or transmitter.

3.9 EVOLUTION 6000X User Interface and Operation

In addition to the features, functions and options found in the EVOLUTION 6000 and EVOLUTION 6000+ models, the EVOLUTION 6000X camera features image and video capture capability.

On-Screen Indicators

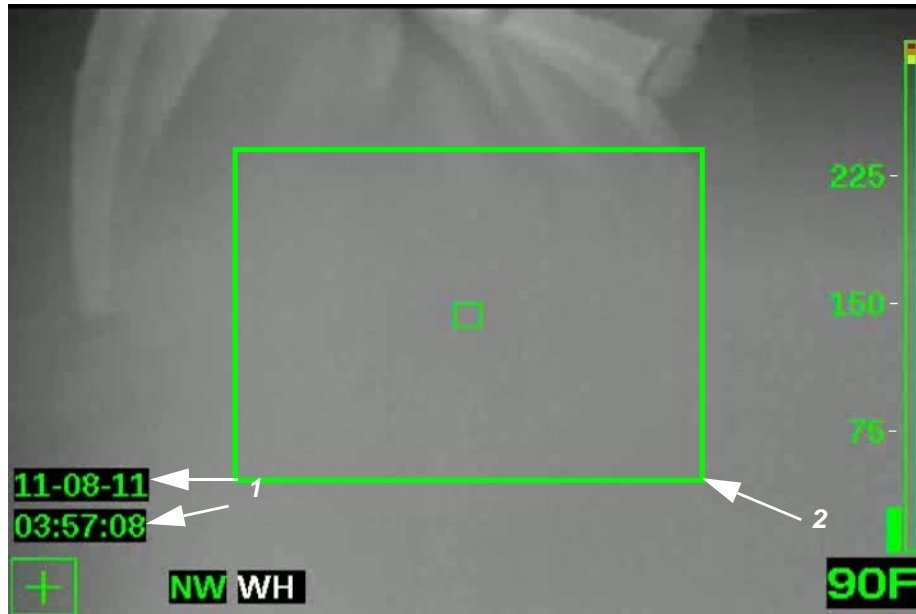


Fig. 10 On-screen indicators

- 1 Video recording indicator, date and time
- 2 Image capture

Video Capture

Video capture is available in both the NFPA Basic and NFPA Plus operational modes as it does not impact camera operation. When video capture is enabled and turned ON (in camera configuration or via the MSA FireService Utility application), the EVOLUTION 6000X TIC begins recording video in five-minute MPG4 formatted video clips. A time and date stamp on the display indicates the start of each new five minute clip.

NOTE: The time and date stamp does not appear on the display or captured video when the EVOLUTION 6000X TIC is in NFPA Basic mode. However, video is still captured if video capture is enabled.

NOTE: The video capture system requires approximately 30 seconds to start up before video is captured. Although an image will appear on the screen, no video will be captured during this time. In addition, 5-10 seconds of video will not be recorded during the transition from one video clip to the next.

Image Capture

NOTE: Image capture is only available in the NFPA Plus operating mode. Activation of image capture differs, depending on installation of the flashlight/laser pointer option or the range finder option.

Still images can be captured using the Trigger button and saved to EVOLUTION 6000X TIC memory for later download to a PC.

Trigger Operation with Flashlight and Laser Pointer Option Installed

Successive Trigger Pulls	Result
First short pull	Turns flashlight ON
Second short pull	Turns flashlight OFF and turns laser pointer ON
Third short pull	Turns laser pointer OFF
Single, long trigger pull	Captures a still image

NOTE: The laser pointer and flashlight do not function at the same time.

Trigger Operation with Range Finder Option Installed

Trigger Pulls	Result
Short trigger pull	Captures a still image
Long trigger pull	Takes a distance measurement

Naming Conventions for Still Image Files and Video files

Still images are stored as JPG files in a directory called "Pictures" and named by date and time in modified ISO 8601 formatting.

For example **2012_05_14-13-58-00.jpg** is a still image captured at 13:58:00 (1:58 PM) on May 14th, 2012.

Video files are stored as MPEG 4 files in a directory called "Video" and also named by date and time.

For example: **2012_02_14-18-23-45.M4V** is a video file started at 18:23:45 (6:23:45 PM) on February 14th, 2012.

VLC Video Player from VideoLAN (free download: www.videolan.org) is recommended for opening and viewing video files.

Storage Space for Saved Files

Videos are saved in a MPEG4 format. A minimum of four hours of video can be stored. Once the video memory is full, new clips overwrite the oldest clips.

Images are saved in a JPG format. A minimum of 1000 images can be stored. Once the image memory is full, new images overwrite the oldest images.

Video files are stored in the "Video" folder and the still images are stored in the "Pictures" folder in the camera.

Downloading files from the EVOLUTION 6000X TIC to a PC

Downloading video and still image files from the EVOLUTION 6000X TIC is similar to copying files from a USB storage device. The camera must be ON for a minimum of 30 seconds to allow the video system to start before attempting to download videos and captured images.



Fig. 11 USB Port A location

- (1) Connect the supplied USB cable to the PC.
- (2) Open the camera battery door to expose the USB ports. Do not remove the battery.
- (3) Turn ON the camera.
- (4) Locate the USB port labeled "A" under the battery door and connect the USB cable to this port (See Fig. 11).
 - ▷ The camera appears as an external hard drive on the computer.
- (5) Use the computer to locate the files. (Video files are stored in the "Video" folder and the still images are stored in the "Pictures" folder in the camera.)
- (6) Use the computer to move, copy and delete files.

NOTE: To prevent overwriting or loss of files, it is recommended to download the files and then delete the files from the camera after every use.

NOTICE

As with any external storage device, be sure to safely remove/eject hardware before unplugging the USB cable. Failure to do so may result in lost or corrupted files. The USB hardware is called "File-backed Storage Gadget".

3.10 Battery Installation



WARNING

Risk of injury!

Never replace the batteries in a hazardous location or an explosive atmosphere. There is a risk of explosion since the batteries can spark when being changed!

The EVOLUTION 6000 series cameras run on a single lithium Ion battery pack.

Replacement batteries must have the same power and layout as those delivered by MSA with the camera. Unsuitable batteries can lead to a system failure.

- (1) Place the camera on a clean, non-abrasive surface.



- (2) Open the battery compartment by pulling down on the battery latch and swinging the battery compartment door forward.



- (3) Place the battery inside the battery compartment with the battery logo and arrow pointing toward the top of the camera. The battery compartment is designed to prevent incorrect battery insertion.



- (4) Gently push the battery into place.

- (5) Close and latch the battery compartment.

NOTE: To remove battery, reverse the above Battery Installation procedure.

3.11 Battery Charging



WARNING

Do not charge the batteries in a hazardous location or an explosive atmosphere.

Truck Mounted Charger

The MSA EVOLUTION 6000 Series Truck Mounted Charger provides for simultaneous charging of the battery in the camera and a spare battery.

- Charge status indication for the battery in the camera displays on the camera's front panel. See the Charging Indicator section of the manual (→ chapter 3.4 for details).
- Charge status indication for the spare battery is located on the Truck Mounted Charger. See table in this section.

To charge the battery while in the camera:



- (1) Place the camera in the truck mounted charger.
 - Ensure that the handle is firmly inserted into the retainer.
 - Ensure that the camera is aligned properly to ensure a good charging connection.



- (2) Pull the camera retainer up and over the camera so that it rests on the display.

To charge the spare battery:

- (1) Insert the battery into the spare battery charging slot.
- (2) Ensure that the charge indicator lights when the battery is inserted.

Indication	Status
Red light	Battery is charging
Green light	Charging is complete
Flashing red light	Error has occurred

A fully depleted battery recharges in the truck mounted charger in approximately 4 hours.

Multi-Use Charger

The MSA Multi-Use Charger may be used to simultaneously charge up to two spare Evolution 6000 TIC batteries. This charger is supplied with a 120/240 VAC universal power adapter and a 12 V automotive lighter/power outlet cable for mobile use. See Multi-Use Charger instructions for complete details.

To charge a spare battery:

- (1) Ensure that camera battery adaptor insert (supplied with Multi-Use charger) is properly inserted in the Multi-Use Charger nest (Fig. 12).

NOTICE

Failure to insert the camera battery adaptor may lead to misalignment and damage to the charging connector on the pack and on the charger.

- (2) Ensure that charge indicator light (associated with the charging nest being used) lights when the battery is inserted.

Indication	Status
Red light	Battery is charging
Green light	Charging is complete
Flashing red light	Error has occurred



Fig. 12 Battery insert placement in the Charger nest

A fully depleted battery recharges in the Multi-Use Charger in approximately 4 hours.

3.12 Battery Care

Each time the camera is used, the batteries must be checked following the criteria below:

- Damage to the battery housing
- Damage to the battery contacts
- Dirt and debris on the batteries
- Proper function of the camera, charger device and all indicators

Cameras and accessories which do not pass this inspection must be removed from service until they have been repaired.

Batteries which do not pass the test must be replaced.

NOTE: It is recommended to recharge batteries every six months if they have not been in use or if they have not been kept continuously in a charger.

4 Camera Setup

4.1 On-Screen Camera Setup (EVOLUTION 6000+ TIC and 6000X TIC Only)

Several commonly modified options can be accessed directly via a simple on-screen menu on the EVOLUTION 6000+ and EVOLUTION 6000X TIC. These options are accessible via the camera menu. Also, many advanced options are available with the MSA Fire Service utility package.

The Fire Service utility package is required to access the options on the EVOLUTION 6000 TIC (which does not have an on-screen menu). Refer to the operating instructions that come with the Fire Service utility package for information on available options and how to use the package. The Fire Service utility package is available as a free download from www.MSAafety.com and with the product CD included with the camera.

The on-screen configuration menu provides a means to change the following:

- Digital temperature target (°F or °C) (Spotmeter)
- Compass configuration and calibration (EVOLUTION 6000+ TIC and EVOLUTION 6000X TIC)
- Display brightness
- Range finder units (feet or meters) if optional range finder is installed
- Video Transmitter ON /OFF and channel selection if optional video transmitter is installed
- Video Record ON / OFF (EVOLUTION 6000X TIC only).

4.2 Accessing On-screen Configuration Menu

- (1) Turn the camera ON and ensure it is in the NFPA Basic mode.
- (2) Turn the camera upside down.
- (3) Simultaneously push and hold the ZOOM and PALETTE buttons for three seconds until the On-screen Setup menu appears.
- (4) Release the ZOOM and PALETTE buttons.
- (5) Return camera to the upright position.
 - ▷ The Config menu displays.

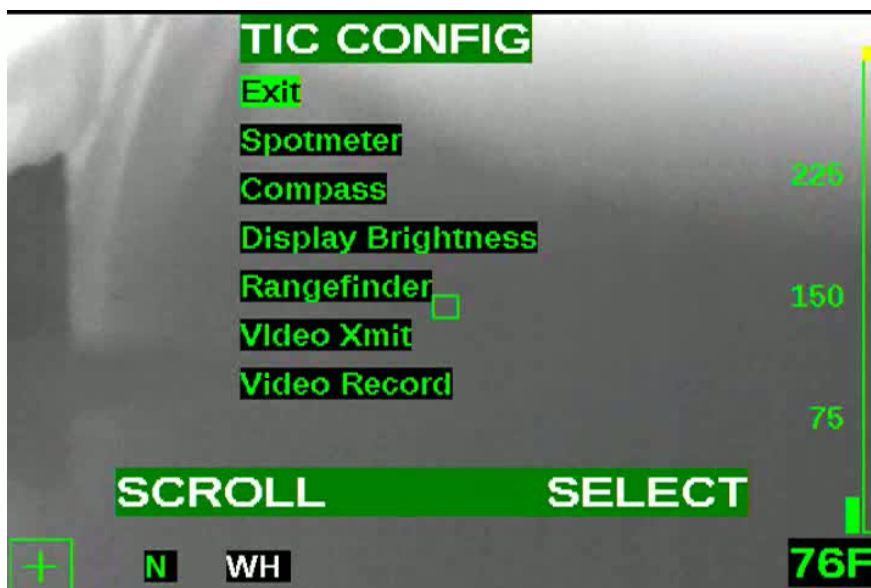


Fig. 13 Configuration menu (EVOLUTION 6000+ TIC and 6000X TIC only)

4.3 Options

Selecting Options

Button	Functions as
ZOOM button	SCROLL button (scrolls through available options)
PALETTE button	SELECT button (selects the option)

NOTE: Options not installed on the camera do not display.

NOTE: Options locked by the MSA FireService Utility will appear grayed out and cannot be selected.

Configuring Options

For all options, the current selection displays

Option	Description
Exit	To exit configuration menu and return to normal operation
Spotmeter (Digital Temperature Target)	<p>Temperature Display Setting-°F or °C selection for the spot meter display</p> <p>(1) SCROLL to either °F or °C and SELECT to change the current selection.</p> <p>▷ Selection is confirmed and camera returns to the main Config menu.</p>
Compass	<p>Compass ON/OFF, Display Config and Calibration (if local control was not disabled via MSA FireService Utility package)</p> <p>(1) SCROLL to COMPASS ON or COMPASS OFF and SELECT to turn compass ON or OFF.</p> <p>(2) SCROLL to SET DISPLAY TYPE TEXT and SELECT to select text icons (displayed as N, S, E, W, NW, etc).</p> <p>(3) SCROLL to SET DISPLAY TYPE ICON and SELECT to select a compass icon to indicate direction.</p> <p>(4) SCROLL to CALIBRATE and SELECT to calibrate the compass.</p> <p>▷ It is recommended that the compass be recalibrated at least monthly, especially if camera is subjected to strong magnetic fields.</p> <p>(5) Choose YES to proceed with the calibration and NO to exit calibration.</p> <p>(6) Follow the on-screen instructions.</p> <p>(7) Hold the camera in front of you and face north.</p> <p>(8) Tumble the camera in all three axes.</p> <p>▷ When ALL DONE displays, the compass is successfully recalibrated.</p> <p>▷ If "Calibration Failed" displays, exit and try again.</p> <p>(9) SELECT EXIT to exit compass calibration.</p> <p>▷ Selection is confirmed and camera returns to the Config main menu.</p>

Option	Description	
Display Brightness	Sets display brightness or allows for auto brightness control.	<p>(1) SCROLL to Set Brightness Auto and SELECT to enable auto brightness control.</p> <ul style="list-style-type: none"> ■ Auto brightness automatically adjusts screen brightness in three levels, depending on ambient light. ■ The ambient light sensor is to the right of the battery status indicator. <p>(2) To set the screen brightness to low, medium or high, SCROLL to:</p> <ul style="list-style-type: none"> ■ Set to Low ■ Set to Med or ■ Set to High <p>(3) and SELECT.</p> <p>Selection is confirmed and camera returns to the Config main menu.</p>
Range Finder	Units (feet or meters) selection for the range finder	<p>(1) SCROLL to:</p> <ul style="list-style-type: none"> ■ Set to Feet or ■ Set to Meters, <p>(2) and SELECT.</p> <p>Selection is confirmed and camera returns to the Config main menu.</p>
Video Xmit -	Turning optional video transmitter ON and OFF, and selecting the channel (if local control was not disabled via the MSA FireService Utility package)	<p>(1) To turn video transmitter ON or OFF, SCROLL to</p> <ul style="list-style-type: none"> ■ Set Video Xmit ON or ■ Set Video Xmit OFF <p>▷ Camera front panel video transmit LED illuminates.</p> <p>(2) To choose one of the two available video channels, SCROLL to:</p> <ul style="list-style-type: none"> ■ Set Channel to A or ■ Set Channel to B. <p>NOTE: Two camera video transmitters in the same approximate area cannot operate on the same channel at the same time.</p> <ul style="list-style-type: none"> ▷ Selections are confirmed. ▷ Camera returns to the Config main menu.
Video Record	Turning optional video recorder ON and OFF (if local control has not been disabled via the MSA FireService Utility package).	<p>(1) To turn video recording ON or OFF, SCROLL to:</p> <ul style="list-style-type: none"> ■ Set Video Recorder ON or ■ Set Video Recorder OFF. <p>Selection is confirmed and camera returns to the Config main menu.</p>

Exiting the On-screen Setup Menu and Returning to Normal Operation

- (1) SCROLL to the EXIT option.
- (2) SELECT EXIT to return to normal operation.

4.4 MSA EVOLUTION 6000 Configuration Application

The MSA EVOLUTION 6000 Configuration Application is available for the Windows operating system and enables the user to completely configure the camera. All configuration options found in the On-Screen Configuration menu are available as well as many more that allow complete access to all configurable camera settings.

Some of the available options include:

- Color Palette selection and enable/disable (EVOLUTION 6000+ TIC, EVOLUTION 6000X TIC)
- Compass directional display options (EVOLUTION 6000+ TIC, EVOLUTION 6000X TIC)
- Video transmitter control, including local lockout
- Video capture control, including local lockout (EVOLUTION 6000X TIC)
- Set time and Date (EVOLUTION 6000X TIC)

NOTE: The available options depend on the EVOLUTION 6000 TIC.

Minimum FireService Utility PC requirements:

- 1 GHz processor
- 512 MB RAM
- 850 MB disk space (32 bit) or 2 GB disk space (64 bit)
- Windows Vista SP2, Windows 7, Windows 8, or newer.

Accessing Options and Settings via MSA EVOLUTION 6000 Configuration Application

Connect the supplied USB cable to the PC.

NOTE: If not using the supplied USB cable, use only cables 3 m (9 ft) or less in length.

Start the MSA EVOLUTION 6000 Configuration Application.

- The utility searches for a camera.



Fig. 14 Searching for TIC Connection display

- (1) Open the camera door to expose the USB ports. Do not remove the battery.
- (2) Locate the USB port B under the battery door and connect the USB cable (→ Fig. 11, page 29).
- (3) Turn ON the EVOLUTION 6000 TIC.

NOTE: The EVOLUTION 6000 TIC must NOT be in the OnScreen Setup mode when using the MSA EVOLUTION 6000 Configuration Application.

- (4) Follow the instructions on the PC.

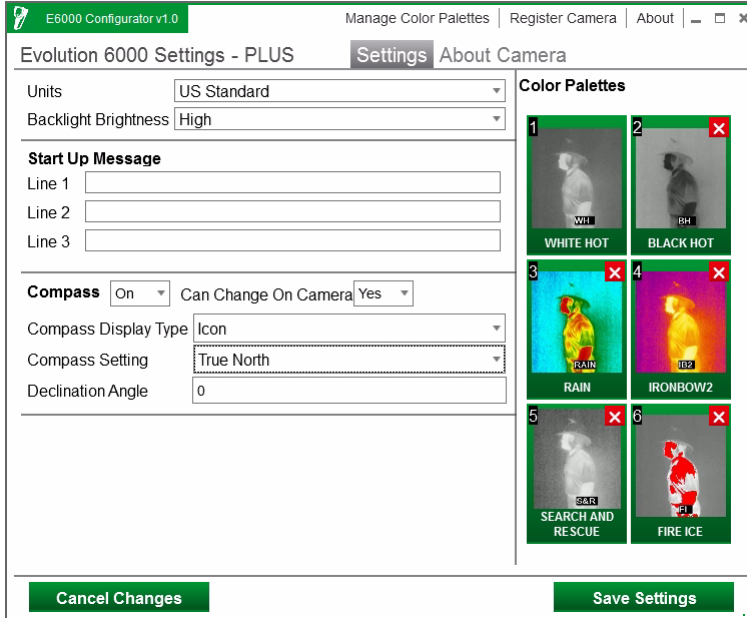


Fig. 15 TIC Settings

5 Maintenance



WARNING

Do not open the thermal imaging camera housing as there are no user serviceable parts inside. Only authorized personnel may service the unit. FAILURE TO FOLLOW THE ABOVE WARNING CAN RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

The product should be regularly checked and serviced by trained personnel. A record must be kept of the periodic inspection and maintenance. Always use original parts from MSA.

Repairs and maintenance must be carried out only by authorized MSA service centers.

Changes and modifications are not permitted and may result in voiding the approval.

MSA is liable only for maintenance and repairs carried out by MSA.

The camera must be stored in a dry, protected location between -40°C and +70°C (-40°F and 158°F).

5.1 Before Each Use

Each time the camera is used, a visual inspection must be performed following the criteria below:

- Check for housing damage due to mechanical, chemical or thermal loads.
- Inspect the camera for loose or missing screws, O-rings or seals.
- Check for cracks and other damage to the display. Verify that all device labels are attached.

5.2 After Each Use

- (1) Carefully clean all outside surfaces [camera housing including the handles, lens, display window and carrying devices] with warm water and a gentle cleaning agent.
- (2) Carefully dry using a soft, lint-free cloth. Avoid scratching the display window.
- (3) All switches, buttons, battery compartment locks and lids must be inspected for dirt and cleaned using a soft, lint-free cloth and brush if necessary.

NOTICE

Do not use any solvents or thinners to clean the camera as they may attack the camera housing materials. Do not use abrasive cleaners or cloths for cleaning the camera as these may also damage the camera.

5.3 Germanium Lens Replacement

The camera is designed for simple replacement of a damaged Germanium lens.

WARNING

The germanium lens must be replaced immediately after damage is detected. Failure to do so may allow water and other contaminants to enter the camera body, resulting in a possible loss of camera function and severe damage to electronic components. Should water or other contaminants enter the camera housing, the camera must be returned to an authorized MSA repair facility. Do not operate the camera with a damaged germanium lens.



Fig. 16 Germanium lens retainer, parts and tools



Fig. 17 Germanium lens retainer, screws to be removed

To replace the germanium lens:

- (1) Remove the battery from the camera.
- (2) Using a 2.5 mm Allen wrench, remove the six screws holding the germanium lens retainer.
- (3) Remove the broken germanium lens and any dirt that may have entered the sealing area.
- (4) Insert the new lens in the retainer and reinstall on the camera.
- (5) Tighten the six screws to 1.6 Nm (14 in-lbs.) of torque.

6 Service

If your camera requires service or repair:

- (1) Contact the MSA Service Center at 1-877- MSA-FIRE. Describe the problem to the Representative as completely as possible.
- (2) Verify with your Representative that the product should be returned to MSA.
- (3) Before returning the product, decontaminate and clean your Thermal Imaging Camera to remove any hazardous materials that may have settled on the product during use.
 - ▷ Laws and/or shipping regulations prohibit the shipment of hazardous or contaminated materials.
- (4) Ship returned products (including those under warranty) with pre-paid transportation charges; MSA cannot accept returned goods on a freight-collect basis.

7 Technical Data

NFPA 1801, 2012 Edition Compliant (unless ordered otherwise, refer to the product label)

ANSI/UL 12.12.01 Class I, Div. 2 Groups A, B, C and D

Non-Incendive

Construction	Flame retardant (material passes NFPA direct flame exposure test). IP67 (withstands immersion to 3 feet (1 meter))	
Approximate Dimensions	Height	11.6 inches (295 mm)
	Width	4.8 inches (122 mm)
	Length	7.3 inches (185 mm)
Sensor	Uncooled VOX microbolometer	
Array size	320 X 240	
Weight (including battery)	EVOLUTION 6000 and EVOLUTION 6000+	1.25 kg
	EVOLUTION 6000X	1.31 kg
Power Source	Rechargeable Li Ion battery	
Operating time (nominal 72°F, 22°C)	EVOLUTION 6000 and EVOLUTION 6000+	2.5 to 3.5 hours depending on mode
	EVOLUTION 6000X	2.0 to 3.0 hours depending on mode
Field of view	48° H; 37° V	
Net equivalent temperature difference	High sensitivity	<78 mK, 40 mK typical
	Low sensitivity	<234 mK
Range Finder	Maximum Range	210 ft (70 m)
Temperature Measurement	±10 °C (18 °F) or ±10 % whichever is greater	
Image storage (Evolution6000X only)	Number of images stored	1000 minimum
	Format	JPG
Video storage (Evolution6000X only)	Length	4 h minimum
	Format	MPEG 4 elementary stream, no audio
Start / Soak Temp	Ambient Temperature	Operating Time
Room Temp (20 - 23 °C)	80°C (176°F)	>30 minutes
Room Temp (20 - 23 °C)	120°C (248°F)	>20 minutes
Room Temp (20 - 23 °C)	260°C (500°F)	> 6 minutes
Room Temp (20 - 23 °C)	-40°C (-40°F)	>25 minutes
Room Temp (20 - 23 °C)	-30 C (-22°F)	>40 minutes
Storage temperature range	-40°C to +70°C (-40 °F to 158 °F).	

7.1 Technical Data Transmitter

Power at 22° C	max. 500 mW
Transmission Range	≈ 1000 m, LDS
Channel 1 Frequency USA	2474 MHz
Channel 2 Frequency USA	2458 MHz

Frequencies and Approvals

EN 301 489 Teil 1 & 3 (2000-08), EN 300 440-2V1.1.1 Teil 1 & 3 (2001-09),

BAPT 222 ZV 105 & 106, BAP 122 R1, EMC,

EN 61000-6-3 and EN 61000-6-2 / FCC Part 90 (for 2.4 GHz)

8 Ordering Information

Description	Part No.
Lithium Ion Battery	10120606-SP
Multi-Use Charger (12V) Kit	10145859
Germanium Window Replacement Kit	10145772
USB Configuration/video download Cable	10145860-SP
Vehicle Mounted Charger Mounting Kit	10040222
Vehicle Mounted Charger Fuses	10145746-SP
Wrist Strap	10039516
Shoulder Strap	10039515
Retractable Lanyard	10040226
Carabiner	10040005
Carrying Case	10127441-SP
Tripod Mount	10145748
Label Kit (Reflective ID)	10145749
Fire Station Kit	10145750
Vehicle Kit	10145771

MSA - The Safety Company

[www.MSAsafety.com]

MSA North America

MSA Corporate Center

1000 Cranberry Woods Drive
Cranberry Township, PA 16066
Phone 1-800-MSA-2222
Fax 1-800-967-0398

Germany

MSA AUER GmbH

Thiemannstrasse 1
12059 Berlin
Phone +49 [30] 68 86 0
Fax +49 [30] 68 86 15 17
info.de@MSAsafety.com

Italy

MSA Italiana S.p.A.

Via Po 13/17
20089 Rozzano [MI]
Phone +39 [02] 89 217 1
Fax +39 [02] 82 59 228
info.it@MSAsafety.com

Austria

MSA AUER Austria

Vertriebs GmbH
Modecenterstrasse 22
MGC Office 4, Top 601
1030 Wien
Phone +43 [0] 1 / 796 04 96
Fax +43 [0] 1 / 796 04 96 - 20
info.at@MSAsafety.com

Spain

MSA Española, S.A.U.

Narcís Monturiol, 7
Pol. Ind. del Sudoeste
08960 Sant-Just Desvern
[Barcelona]
Phone +34 [93] 372 51 62
Fax +34 [93] 372 66 57
info.es@MSAsafety.com

SLOVAKIA

MSA AUER Slowakei - o.z.

Horárska 12
815 24 Bratislava
Phone +421 [2] 444 565 92
Fax +421 [2] 444 565 92
informacie@MSAsafety.com

BULGARIA

MSA Bulgaria

ул. Костенски Водопад 47 Б, ет. 1,
офис 8
София 1404
Phone +359 [2] 958 25 85
Fax +359 [2] 958 25 95
infosofia@MSAsafety.com

Canada

MSA Canada

16435 118th Avenue
Edmonton AB T5V 1H2
Phone 1-800-672-2222
Fax 1-800-967-0398

Great Britain

MSA (Britain) Limited

Lochard House
Linnet Way
Strathclyde Business Park
BELLSHILL ML4 3RA
Scotland
Phone +44 [16 98] 57 33 57
Fax +44 [16 98] 74 01 41
info.gb@MSAsafety.com

Switzerland

MSA Schweiz

Eichweg 6
8154 Oberglatt
Phone +41 [43] 255 89 00
Fax +41 [43] 255 99 90
info.ch@MSAsafety.com

Belgium

MSA Belgium N.V.

Duwijkstraat 17
2500 Lier
Phone +32 [3] 491 91 50
Fax +32 [3] 491 91 51
info.be@MSAsafety.com

Czech republic

MSA Safety Czech s.r.o.

Dolnojircanska 270/22b
142 00 Praha 4 - Kamyk
Phone +420 241440 537
Fax +420 241440 537
info.cz@MSAsafety.com

Poland

MSA Safety Poland Sp. z o.o.

Ul. Wschodnia 5A
05-090 Raszyn k/Warszawy
Phone +48 [22] 711 50 00
Fax +48 [22] 711 50 19
info.pl@MSAsafety.com

Russia

MSA Safety Russia

Походный проезд д.14.
125373 Москва
Phone +7 [495] 921 1370
Fax +7 [495] 921 1368
info.ru@MSAsafety.com

Mexico

MSA deMexico, S A De CV

Fraccionamiento Industrial Avenida
Del Conde #6
76240 El Marques, Queretaro
Phone 01 800 672 7222
Fax +52-44 2227 3943

France

MSA GALLET

Zone Industrielle Sud
01400 Châtillon sur
Chalaronne
Phone +33 [474] 55 01 55
Fax +33 [474] 55 47 99
info.fr@MSAsafety.com

Netherlands

MSA Nederland

Kernweg 20
1627 LH Hoorn
Phone +31 [229] 25 03 03
Fax +31 [229] 21 13 40
info.nl@MSAsafety.com

Sweden

MSA NORDIC

Kopparbergsgatan 29
214 44 Malmö
Phone +46 [40] 699 07 70
Fax +46 [40] 699 07 77
info.se@MSAsafety.com

Hungary

MSA Safety Hungaria

Francia út 10
1143 Budapest
Phone +36 [1] 251 34 88
Fax +36 [1] 251 46 51
info.hu@MSAsafety.com

Romania

MSA Safety Romania S.R.L.

Str. Virgil Madgearu, Nr. 5
Ap. 2, Sector 1
014135 Bucuresti
Phone +40 [21] 232 62 45
Fax +40 [21] 232 87 23
info.ro@MSAsafety.com

UKRAINE

MSA Ukraina

вул. Новокостянтинівська 13/10,
офіс 305
04080 Київ
Phone +380 [44] 205 56 40
Fax +380 [44] 205 56 41
infokiev@MSAsafety.com

Brazil

MSA do Brazil

Avenida Roberto Gordon 138
CEP 09990-901 Diadema
Sao Paulo-Brazil

China

MSA Hong Kong

25th Floor, Jupiter Tower,
No. 9 Jupiter Street

Japan

MSA Japan

165-0051 Tokyo
30-16, Nishiwaseda 3-chome
Shinjuku-ku

International Sales

[Africa, Asia, Australia, Latin America,
Middle East]

MSA Europe

Thiemannstrasse 1
12059 Berlin
Phone +49 [30] 68 86 0
Fax +49 [30] 68 86 15 58
info.de@MSAsafety.com