


How To Use?



3 sec-->ON

6 sec-->OFF




3 sec-->ON



Click





Click



6 sec-->OFF




Change the Baseline *

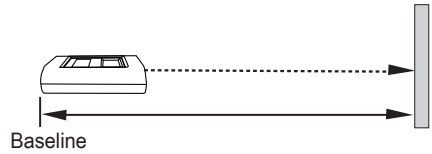

3sec-->ON



Long Press until the baseline changed.



Switch the Unit


1.



5sec



2.

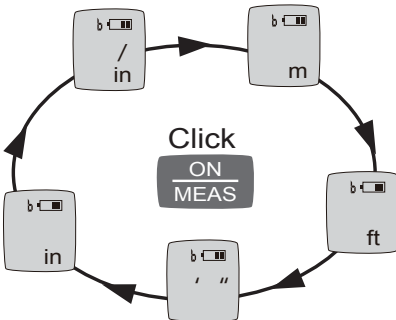

3.




3sec

Confirm Unit and back to the measuring mode.


Rechargeable with USB




1.







2.

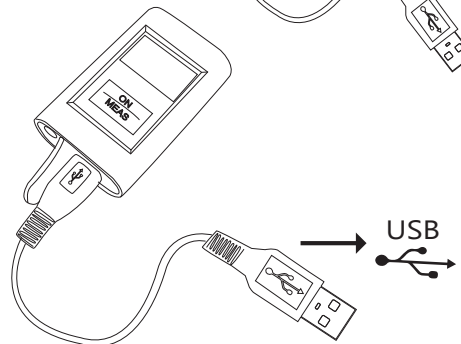

3.







User Safety

-  **WARNING:** To reduce the risk of injury read all safety and operating instructions before using this product.
-  **CAUTION:** While the laser tool is in operation, be careful not to expose your eyes to the emitting laser lens. Exposure to a laserbeam for an extended time may be hazardous to your eyes.
-  **CAUTION:** Hazardous Radiation. Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.
- Retain all sections of the manual for future reference.
-  **WARNING:** The following label samples are placed on your laser tool to inform of the laser class for your convenience and safety. Please reference the Product Manual for the specifics on a particular product model.
- DO NOT remove any warning label(s) on the housing. This instrument must only be used for tasks as outlined in the Product Manual. ALWAYS make sure that anybystanders in the vicinity of use are made aware of the dangers of looking directly into the laser beam.

- DO NOT look into the beam lens with optical aids, such as magnifiers, binoculars or telescopes.
- DO NOT set the instrument at eye level whenever possible.
- DO NOT operate the laser tool if damaged or broken.
- DO NOT stare into the laser beam lens.
- DO NOT direct the laser tool at other persons.
- ALWAYS turn the laser tool OFF when not in use. Leaving the laser tool ON increases the risk of someone inadvertently staring into the laser beam.
- DO NOT disassemble the laser tool. There are no user serviceable parts inside. Disassembling the laser will void all warranties on the product.
- Do not modify the product in any way. Modifying the laser tool may result in hazardous laser radiation exposure.
- DO NOT use this instrument in areas where a risk of explosion is present.
- DO NOT operate the laser tool in combustible areas such as in the presence of flammable liquids, gases, or dust.
- DO NOT use the device when you're charging to avoid any danger if the temperature of battery is too high.



Calibration Mode





1.  **ON/MEAS** $\xrightarrow{7\text{sec}}$  Enter to the calibration mode
2. Short press  to switch the value.
The value can be calibrated within $\pm 7/-7$ mm. Please adjust the tolerance as your requirement. Press 1 to 7 to increase and press -1 to -7 to decrease.
3.  **ON/MEAS** $\xrightarrow{2\text{sec}}$ Confirm the value which is adjusted and back to the measuring mode.

Error Signal


Message	Problem	Solution
B.L	Low battery	Charging the device
T.L	Temperature is too low	Warm up the device to the operating temperature range
T.H	Temperature is too high	Cool down the device to the operating temperature range
D.E	Measuring value is wrong	Measure again

Please remain the content of this manual for future reference.

Battery Safety

-  **WARNING:** Batteries can explode or leak and can cause personal injury or fire. To reduce this risk.
-  DO NOT splash or immerse in water or other liquids.
-  DO NOT store or use in locations where the temperature may reach or exceed 105 F (45.5 C) (such as outside sheds or metal buildings in summer). For best life, store in a cool, dry location.
-  DO NOT incinerate even if severely damaged or completely worn out. The battery can explode in a fire. Toxic fumes and materials are created when lithium ion batteries are burned.
- If battery contents come into contact with the skin, immediately wash area with mild soap and water. If battery liquid gets into the eye, rinse water over the open eye for 15 minutes or until irritation ceases. If medical attention is needed, the battery electrolyte is composed of liquid organic carbonates and lithium salts.
- Contents of opened battery may cause respiratory irritation. Provide fresh air. If symptoms persist, seek medical attention.
- Burn hazard. Battery liquid may be flammable if exposed to spark or flame.
- Fire hazard. Never attempt to open for any reason. If the housing is cracked or damaged, do not charge. Do not crush, drop, or damaged in any way (e.g. pierced with a nail, hit with a hammer, stepped on). Damaged devices should be recycled.
- Longest life and best performance can be obtained if the battery is charged when the air temperature is between 65 F-75 F (18 and 24 C).
- Never use any charger or cable that is damaged, as it may present a risk of fire, explosion, leakage, or other hazard.

End of Life


-  DO NOT dispose of this product with household waste. PLEASE RECYCLE in line with local provisions for the collection and disposal of electrical and electronic waste.

Maintenance and Care

- DO NOT allow to get wet. Damage to internal circuits may result. Laser tool is not waterproof.
- DO NOT leave laser tool in direct sunlight or expose it to high temperatures. The housing and some internal parts are polymeric materials and may become deformed at high temperatures.
- DO NOT store the laser tool in a cold environment. Moisture may form on interior parts when warming up. This moisture could fog up laser windows and / or cause corrosion of internal circuit boards.
- NOTE: When working in dusty location, some dirt may collect on the laser window. Remove any moisture or dirt with a soft, dry cloth.
- DO NOT use aggressive cleaning agents or solvents.

TOP MEASURE

TLM40 Mini



TOP MEASURE INSTRUMENT COMPANY
No.100, Ln. 35, Houke S. Rd., Houli Dist.,
Taichung City 421, Taiwan (R.O.C.)
www.topmeasure.com.tw