

Pipe Lasers



Maximum productivity

- Fast self-levelling
- Automatic target alignment
- Cross axis compensation



Maximum robustness

- IP68 protection
- Full metal housing
- Built to last



Maximum flexibility

- Wide range of accessories
- Long distance remote control
- Safe and versatile charging options

Zeta125 Arrow 4 Series


The various models of the Zeta125 Series give you the flexibility to choose a device that perfectly fits your needs. With the outstanding grade range from -10% to 40%, the Zeta125 is very versatile.

The Zeta125S series pipe lasers make your work more convenient and safer. Thanks to the unique vertical alignment, which can be easily performed with the remote control and a laser receiver, there is no need to climb down into the trench.

The Zeta125G series with the green laser provides four times higher visibility, superior levelling accuracy and allows greater working distances. These features help you achieve the best visibility in nearly any working condition at a distance up to 200 meters. You can be confident that you will achieve maximum efficiency with this pipe laser.

Compact Form

The Zeta125 fits in tight bends and narrow manholes. Due to its slim housing, it is suitable for pipes with 125 mm (5") diameter. Thanks to its weight and the rubber feet, Zeta laser series have a stable stand on any pipe material.

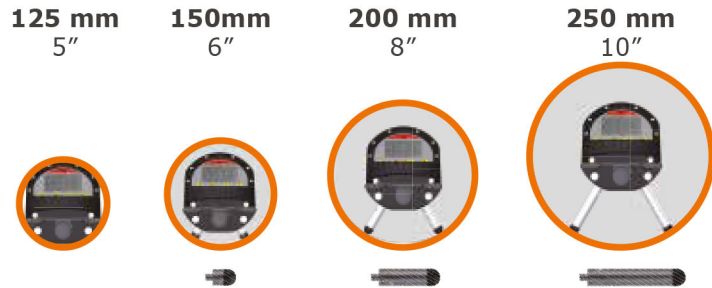

	Arrow 4	Arrow 4G	Arrow 4S	Arrow 4GS
Laser beam	Red	Green	Red	Green
Laser class	3R	3R	3R	3R
Cross axis levelling	Manual	Manual	Automatic (6°)	Automatic (6°)
Vertical level	x	x	✓	✓
Autotarget system	x	x	✓	✓
Manual alignment	x	x	✓	✓
Self-levelling range	-15% to +45%			
Grade range	-10% to +40%			
Protection	IP68			
Power supply	Rechargeable lithium ion battery pack 110/230V AC converter (charge and run simultaneously); 12V power cord			
Battery life	40h Li-Ion battery			
Thread mounting	5/8"			
Operating temperature	+50°C to -20°C (122°F to -4°F)			
Size and weight	305 (12") x 105 (4.1") x 113 mm (4.4"); 2.07 kg			
Operating range	< 200 m (656')			
Detection angle	20° (12m / 40' @30m / 100')			
Rotation speed	1250 rpm			
REMOTE CONTROL				
Operating range	190 m (600') front through the pipe; 7.6 m (25') from rear			
Batteries	3 AA alkaline			
Dimensions	119 x 60 x 30 mm (4.7" x 2.35" x 1.2")			



02/21 842538 en Copyright GeoMax AG.

Illustrations, descriptions and technical specifications are not binding and may change. All trademarks and trade names are those of their respective owners.

AUTHORISED DISTRIBUTION PARTNER

Learn more at:
geomax-positioning.com